
4CAMEL®

EPT 15H




/ . . . 1\ 31 . ICH 3 . . H. 11 3 . H H 3 H

. . . .

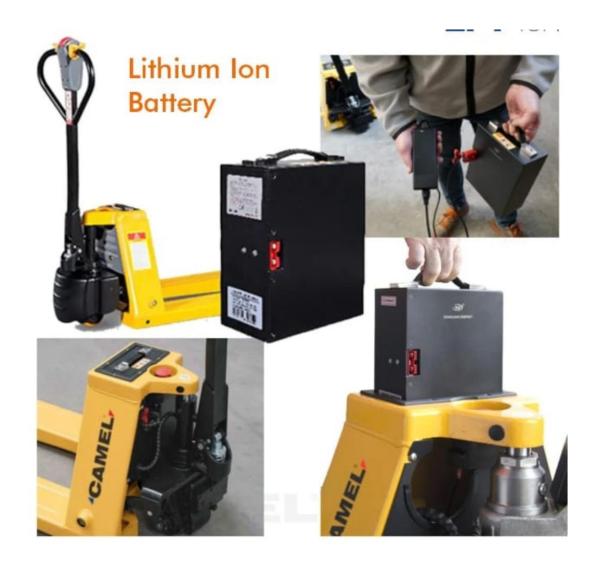

العربة البالتة البطارية الكاملة (ليثيوم),



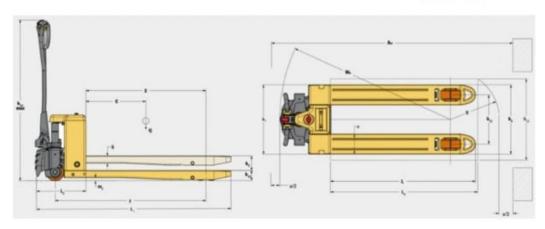

CAMEL.

Model		EPT15H	EPT
Capacity	kg	1500	15
Drive - Operator Type	mm	/ Powered - Pedestrian	Battery Powere
Min./Max. fork height	mm	82 / 197	
Fork Dimension s/e/l	mm	45 / 160 / 1150	
Overall fork width	mm	685	550
Battery	V/Ah	8 V / 10 Ah (Lith.)	48 V / 10
Charger	V/Ah	48 / 5 Ah	
Drive Motor	kW	OC 0.75 Brushless	
Own Weight	kg	6.5 123	116.5
	Capacity Drive - Operator Type Min./Max. fork height Fork Dimension s/e/I Overall fork width Battery Charger Drive Motor	kg Capacity mm Drive - Operator Type mm Min./Max. fork height mm Fork Dimension s/e/l mm Overall fork width V/Ah Battery V/Ah Charger kW Drive Motor	kg Capacity ed - Pedestrian mm Drive - Operator Type 197 mm Min./Max. fork height 0 / 1150 mm Fork Dimension s/e/l 685 mm Overall fork width Ah (Lith.) V/Ah Battery 5 Ah V/Ah Charger Brushless kW Drive Motor

www.camelhandling.com



EPT 15H

Protection Cover



Protects the drive motor Anti-foot stamping

Multi-function Handle



- Horn
- Emergency reverse button
 Butterfly switch (Forward/Reverse)
 Lifting/Lowering button
- LCD Screen

0 0 0 0