


HH BEAM CLAMP MODEL : YS TYPE

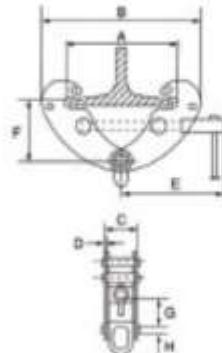

Technical Information:

- Heavy duty construction allows safe and secure grip in the beam.
- Black Color finish.
- Meets the performance requirements of BS-EN 13155.
- Minimum breaking load is 4 times the W.L.L.
- Easy and simple mounting.
- Adjustable to fit a wide range of flange widths and beams.
- Special jaw design applies the load away from the flange edge, thus reducing flange stress.
- MBL Test Certificate available.

TECHNICAL INFORMATION	Product Code	W.L.L. (kg)	Beam Range (mm)	Amtak (mm)	Bmin (mm)	Bmax (mm)	C (mm)	D (mm)	E (mm)	Fmin (mm)	Fmax (mm)	Gmin (mm)	Weight (kg)
	YS1000	1000	75-220	20	100	270	80	5	225	80	165	25	1.8
	YS2000	2000	75-220	20	100	270	85	6	225	90	165	25	5
	YS3000	3000	85-120	30	240	510	117	8	258	125	225	45	9
	YS5000	5000	85-120	30	240	510	125	10	258	125	225	45	11
	YS10000	10000	95-120	30	255	510	150	12	280	160	240	50	16