

# HYDRAULIC HAND PALLET TRUCK

\* The Hand Pallet Truck is the ideal "storage aid" and "handling partner" for all manual transport tasks over short distances, excellently suitable for use on lorries, small warehouses and markets etc.

- \* Durability & Safety
- \* Low Rolling Resistance
- \* Standard Painting System
- \* Ergonomic Handle Design
- \* Heavy Gauge Steel Construction




## HAND PALLET TRUCK

Model	CBY-AC 2.0	CBY-AC 2.5	CBY-AC3.0
Capacity(kg)	2000	2500	3000
Min.fork height(mm)	85/75	85/75	85/75
Max.fork height(mm)	195/185	195/185	195/185
Lifting height(mm)	110	110	110
Fork length(mm)	1150/1220	1150/1220	1150/1220
Single fork width(mm)	160	160	160
Width overall forks(mm)	550/685	550/685	550/685
Fork wheel-single(mm)	80X93/74X93	80X93/74X93	80X93/74X93
Fork wheel-tandem(mm)	80X70	80X70	80X70
Steering wheel(mm)	180X50	180X50	180X50
Self weight(kg)		73-92	
Qty/20 feet container (pcs)	180/144	180/144	180/144



\* The main part of the pallet truck adopts chrome plating treatment, which makes the pallet truck wear resistant and corrosion resistant, and has a longer service life.

Push and pull bars under the cargo can be manually adjusted to control the tilt of the fork.

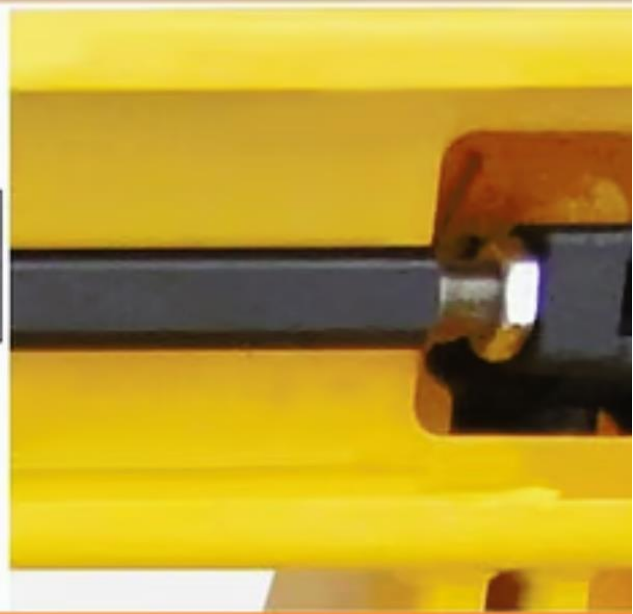

\* The handle adopts a more scientific ergonomic design for comfortable grip. It can better control the descending speed of the pallet and improve the safety of the operation.



# Warehouse








\* The hand pallet truck has a unique anti-rollover design, and its small range internal inclination design can effectively prevent the goods on the fork from tilting.

\* The rocker arm of the pallet truck is made of thickened steel material, which improves the strength of the rocker arm and can prevent the rocker arm deformation caused by heavy load on the cargo fork.



\* The high-quality load bearing wheel equipped with the hand pallet truck can easily pull the heavy objects to ensure the manual pallet jack's stability and safety when transporting goods on the slope.

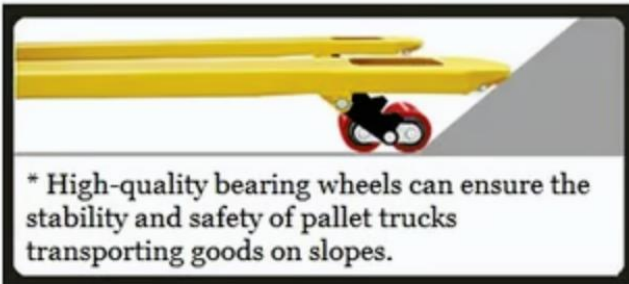

\* High-quality bearing wheels can ensure the stability and safety of pallet trucks transporting goods on slopes.



\* The maximum lifting height of the hand pallet truck can reach 19.5CM, which makes the passing performance of the pallet forklift more better.



## TWO TYPES DIFFERENT WHEELS



**Silent PU Wheel**

\* PU wheel has the characteristics of abrasion resistance, no indentation, silent shock absorption, etc., suitable for marble, paint, epoxy floor and so on.



**Wear-resistant Nylon Wheel**

\* Nylon wheel has the characteristics of low pulling resistance, light pulling, corrosion resistance, etc., suitable for cement floor.



\* The climbing auxiliary wheel equipped with the cargo fork is used to assist the movement when the slope is pushed and pulled within 30°, which is not easy to touch the ground, which can save more effort and improve the work efficiency.




## TWO TYPES DIFFERENT OIL PUMP



### **AC Integrated Casting Pump**

- \* Integral sealed integral casting
- \* The outer surface is galvanized to prevent rust and corrosion
- \* Internal relief valve with overload protection device

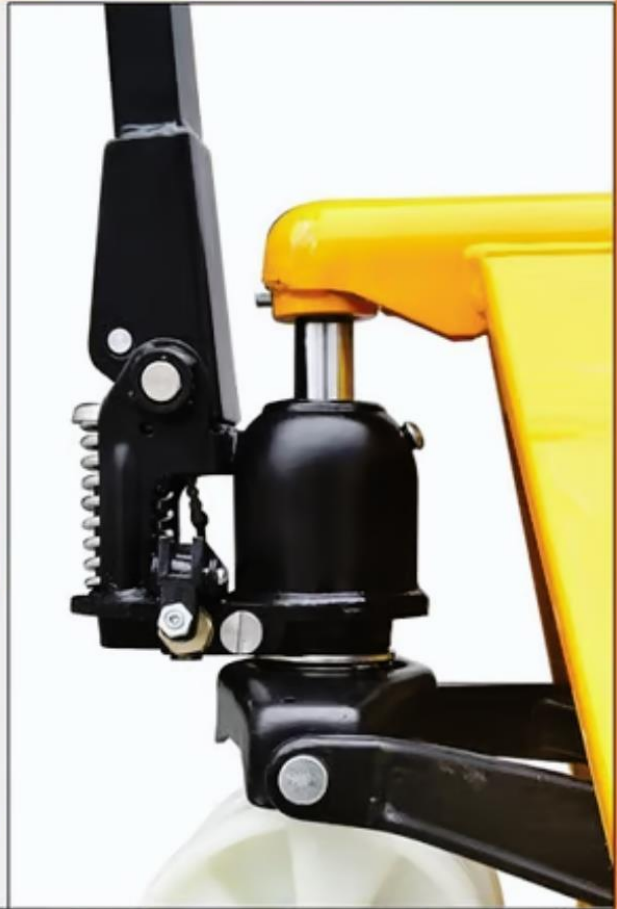

### **DF Welded Type Oil Pump**

- \* Split welding technology
- \* Oil pump equipped with manual slow drop valve for increased safety
- \* Internal relief valve with overload protection device

The high-quality wear-resistant casters used in the hand pallet truck are smooth to use and labor-saving, and have a long service life.



# PRODUCT STRUCTURE DIAGRAM

Ergonomic Handle

Manual Relief Valve

Integral Sealed Durable Cylinder

PU / Nylon / Rubber wheel for optional

Rubber Cushioned Handle

High Strength Alloy Steel Plate

Round Shape Fork End

Chrome Plated Cylinder

Powder Coated Surfaces

Copper Bushing

