



## RATCHED TIE DOWN

### Technical information:


Our lashings are designed to satisfy a wide range of applications including truck, boat, rail, in plant logistics and cargo management.


They are available in a variety of widths (25mm, 50mm, 75mm and 100mm) lengths, colours and hardware fittings.


- 100% polyester with low elongation properties
- Wear sleeves can be fitted to improve the product's lifecycle
- A multitude of hardware fittings are available to suit the application
- All load restraints are manufactured to the latest international standards
- Standard colours are blue or orange.

Other colours and printed webbing are available

- Manufactured Acc. to EN12195-2

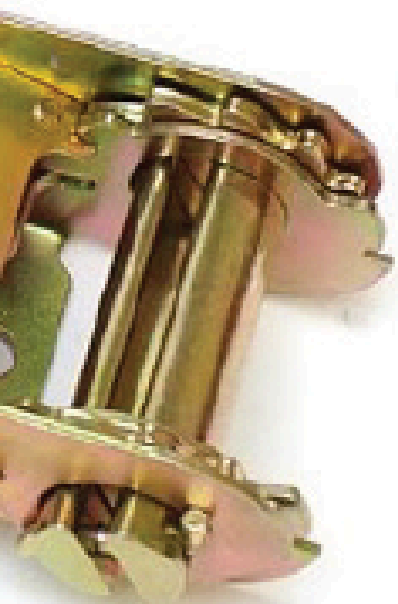

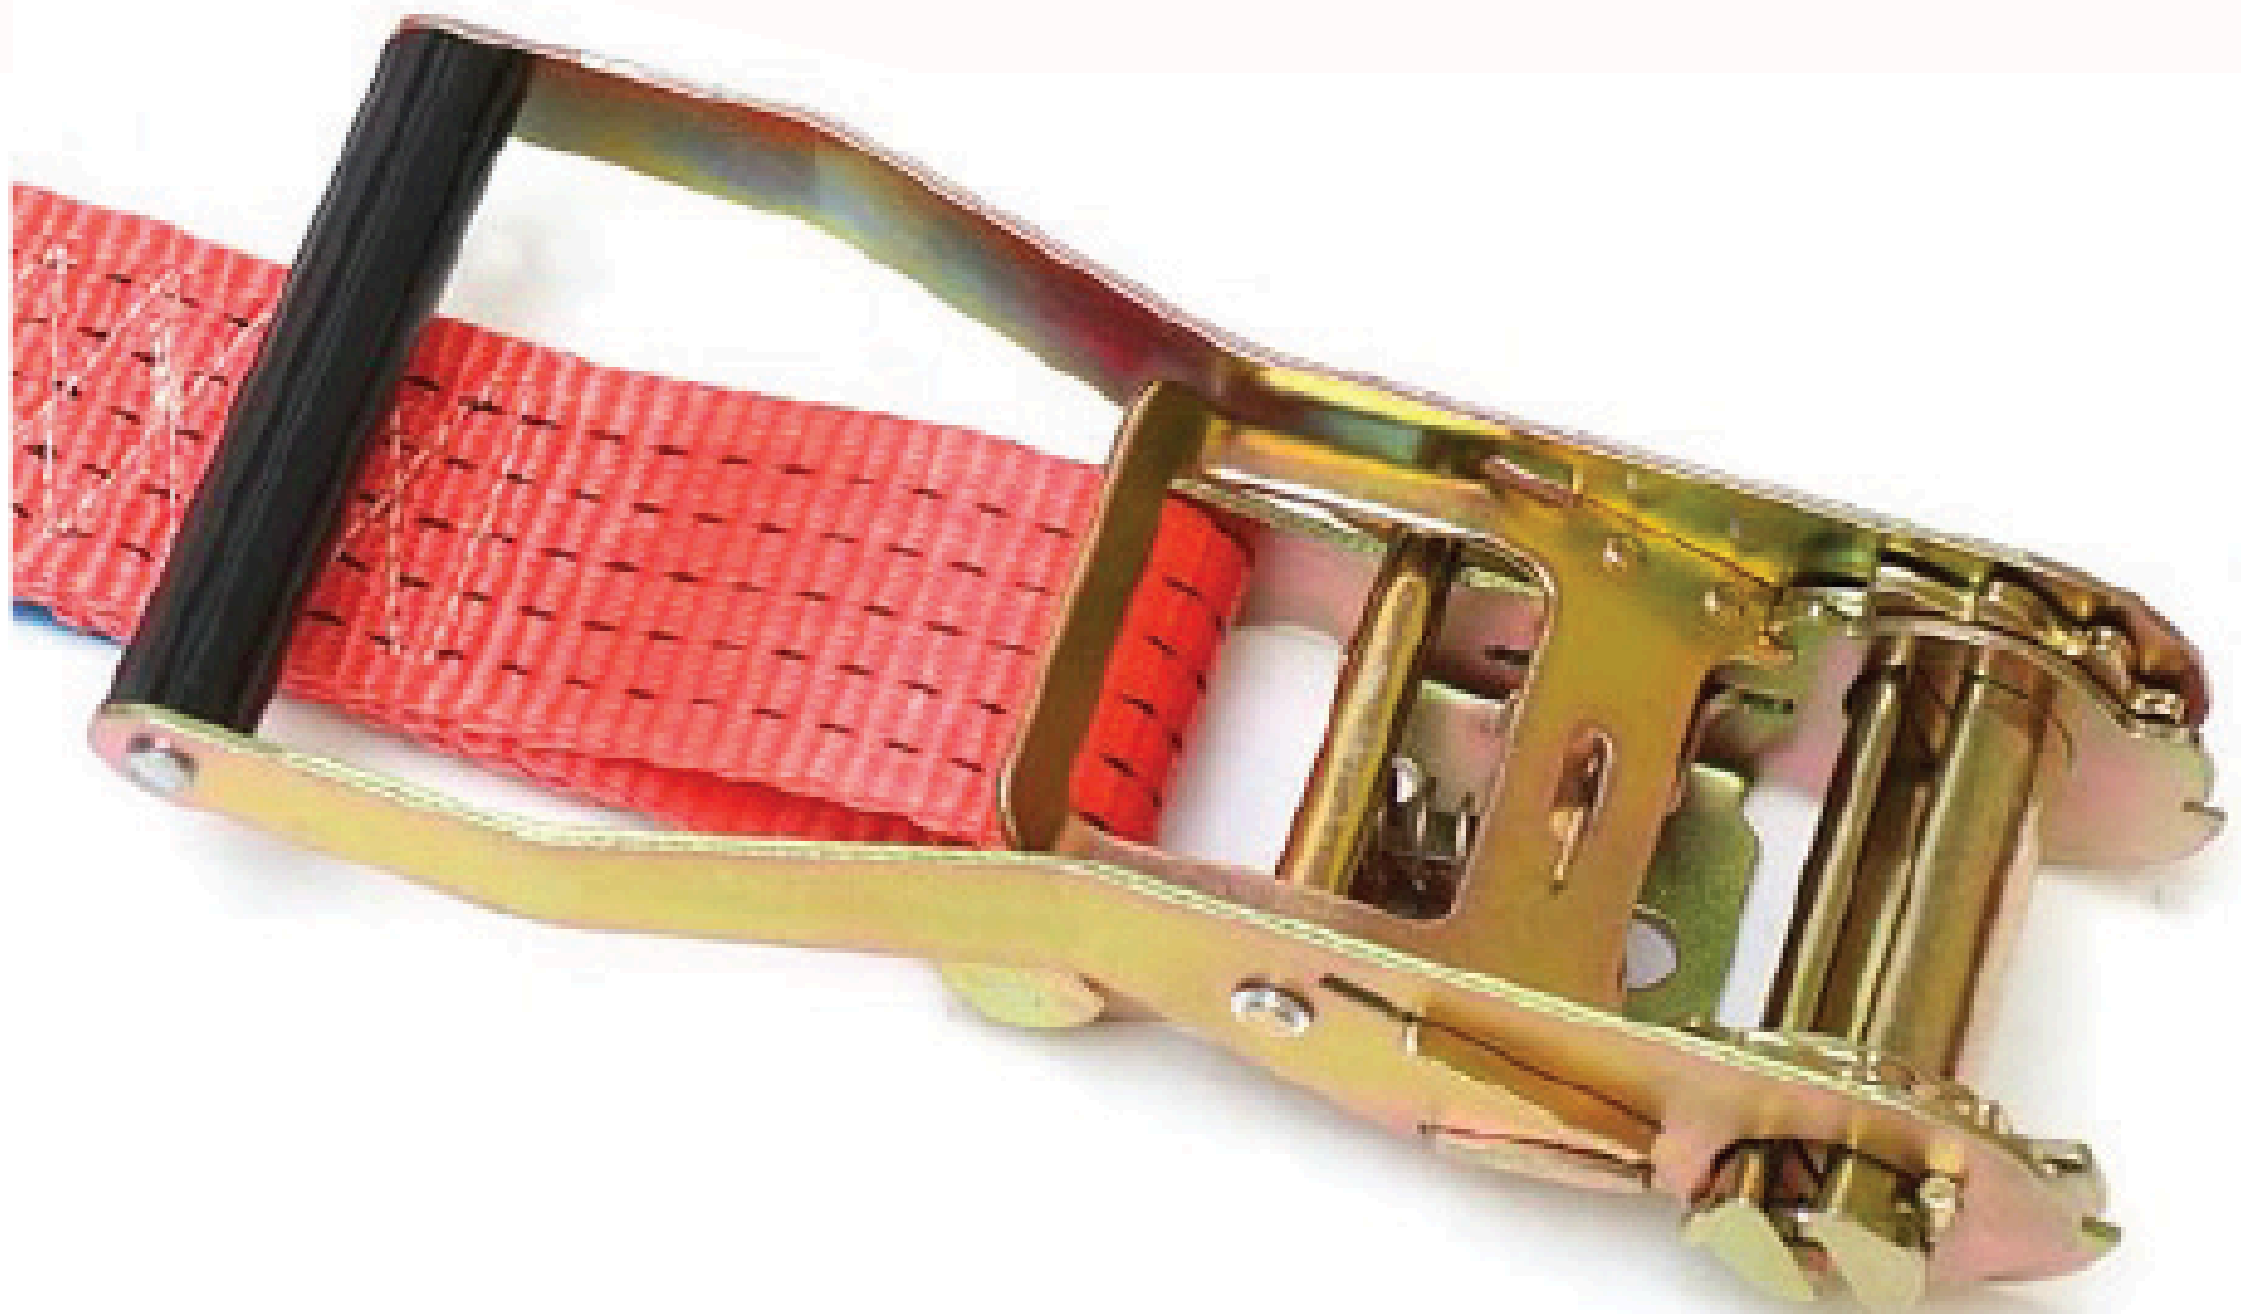

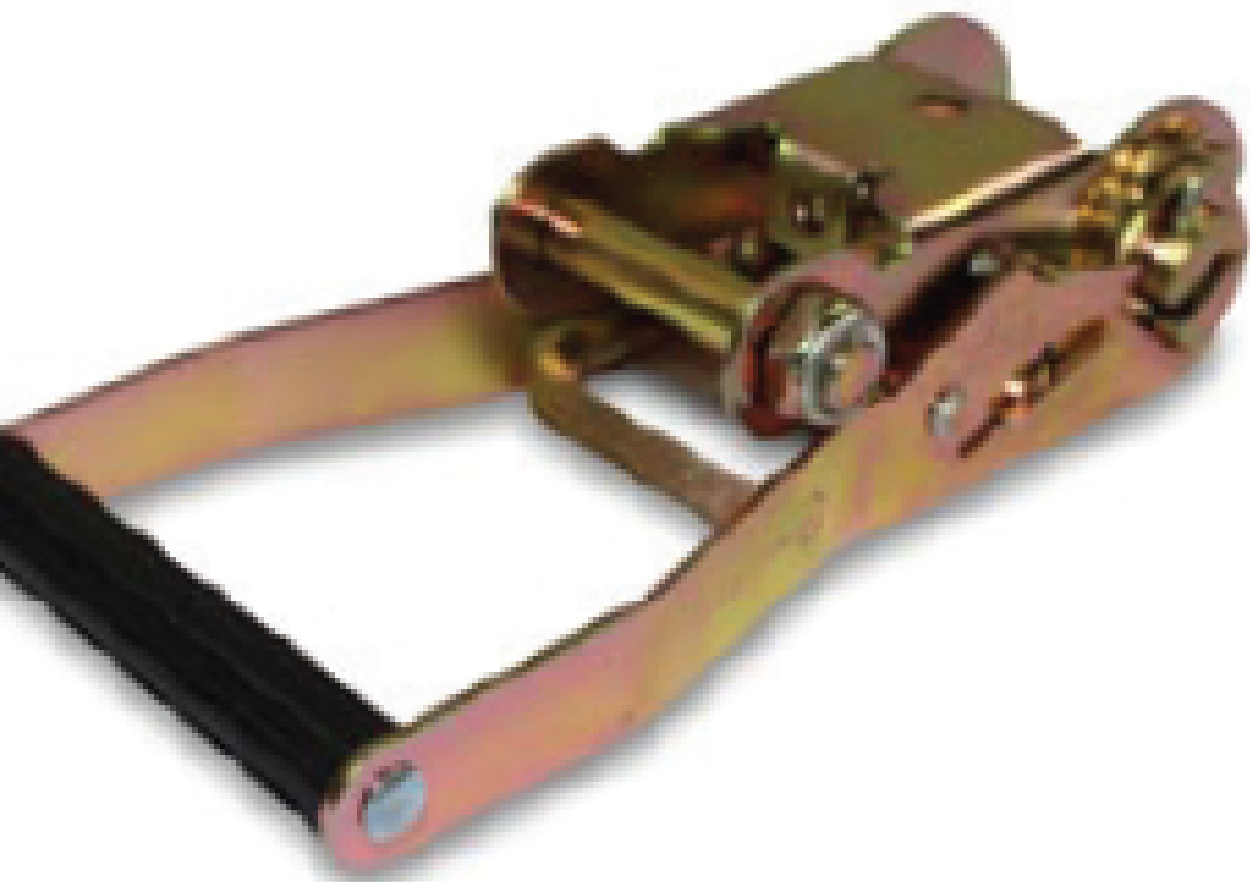

| Webbing Width | Minimum Breaking Strength | End-Fitting Type   | Type            |
|---------------|---------------------------|--------------------|-----------------|
| 1" ( 25 mm )  | 1000 Kgs                  | Double J Hook      | Ratchet         |
| 2" ( 50 mm )  | 3000 Kgs                  | Double J Hook      | Ratchet         |
| 2" ( 50 mm )  | 5000 Kgs                  | Double J Hook      | Ratchet         |
| 3" ( 75 mm )  | 8000 Kgs                  | Double J Hook      | Ratchet         |
| 3" ( 75 mm )  | 10000 Kgs                 | Double J Hook      | Ratchet         |
| 4" ( 100 mm ) | 12000 Kgs                 | Flat/Double J Hook | Winch / Ratchet |